



The Lumeo VI LED Spotlight is a premium-grade lighting solution designed to meet the demands of high-performance, energy-efficient indoor lighting. Built with precision optics and a modern aesthetic, this spotlight is ideal for retail, hospitality, galleries, or architectural lighting.

The Lumeo VI LED Spotlight combines efficient performance, flexible control, and precise lighting – ideal for spaces requiring a clean, modern finish with reliable functionality. With dimming compatibility and multiple beam angles, it's tailored for environments where visual comfort and high-quality illumination are essential.




Technical Data


Wattage	12W / 15W
Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
System Lumen	12W: 960 Lm - 1189 Lm 15W: 1095 Lm - 1360 Lm
CRI	>90
Beam Angle	20° / 30° / 38° / 45° / 50°
IP Rating	IP20
LED Type	CREE / Bridgelux COB / Philips
Warranty	5 Years
Lifetime Expectancy	50,000Hrs (L80 / B10)
SDCM	<3
UGR	<15
Power Supply	Remote Class II Flicker Free Driver
Voltage	220-240V AC
Frequency	50-60Hz
IEC_SDCM	< 5
Working temperature	-20°C~+40°C




Product Dimensions	Ø75x112mm
Cutout	Ø76mm
Fixture Color	Black / White
Product Materials	Aluminium+PC
Unit Weight	0.38 kg
Intelligent Control	On/Off; Triac; DALI; 0-10V
Mounting Options	Recessed

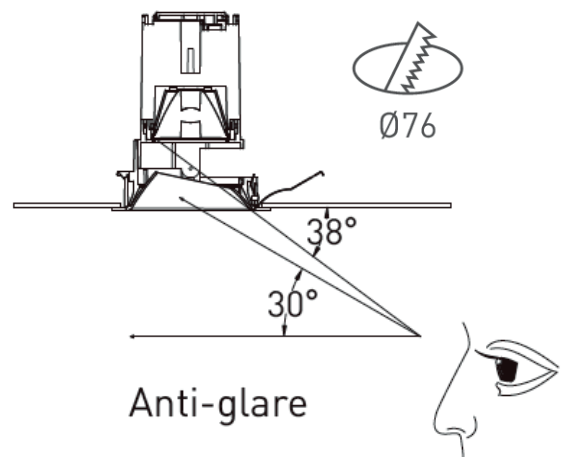


Power	CCT	Beam Angle and Lumens			
		20°	30°	38°	50°
12W	2700K	966 lm	1064 lm	1047 lm	960 lm
	3000K	995 lm	1117 lm	1111 lm	1013 lm
	3500K	1039 lm	1154 lm	1137 lm	1042 lm
	4000K	1073 lm	1189 lm	1167 lm	1074 lm
	5000K	1045 lm	1158 lm	1135 lm	1058 lm
15W	2700K	1095 lm	1220 lm	1205 lm	1104 lm
	3000K	1143 lm	1283 lm	1274 lm	1176 lm
	3500K	1205 lm	1329 lm	1309 lm	1198 lm
	4000K	1225 lm	1360 lm	1340 lm	1244 lm
	5000K	1186 lm	1330 lm	1299 lm	1212 lm

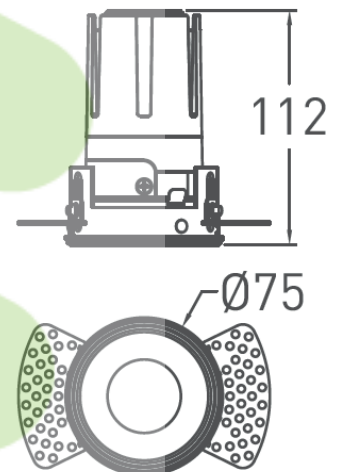

Reflector color

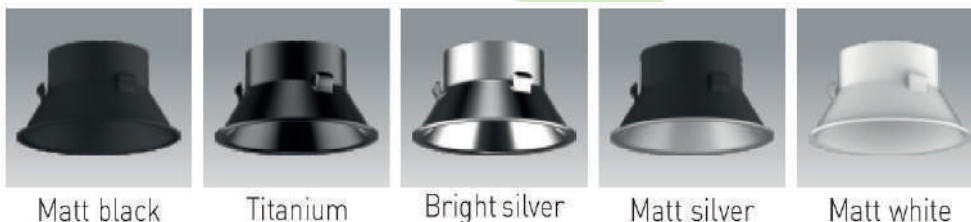

Accessories(Ø40)

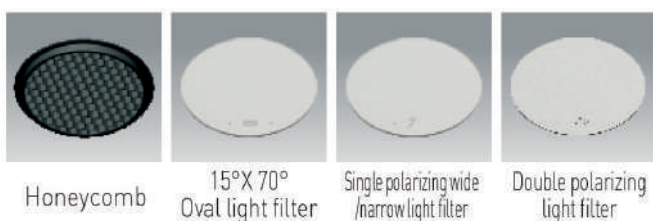

Installation Instruction

