




The Vireo Linear Suspended LED is a cutting-edge lighting solution that combines robust construction, high performance, and modern design. Engineered with IP66 waterproofing and IK10 impact protection, it is built to withstand demanding environments while ensuring long-lasting reliability. Constructed using 94V-0 flame-retardant materials with a Mitsubishi PC housing and aluminum PCB, the fixture offers both durability and sleek aesthetics.




Technical Data

Power	20W/30W/40W/50W/50W/60W
Lumen [Lm]	2600/3900/5200/6500/6500/7800
Working Current [mA]	450/750/950/1200/1200/1400
Light Source	SMD2835
CRI	>80
Beam Angle	120°
AC Input	200-240V
DC Output	30-40V
SDCM	<4
Waterproof	IP66
IK Rate	IK10
Power Factor	>0.95
Warranty	5 Years
Operating Temp	-20~+40°C
CCT	3000K/4000K/5000K/6000K

Dimension

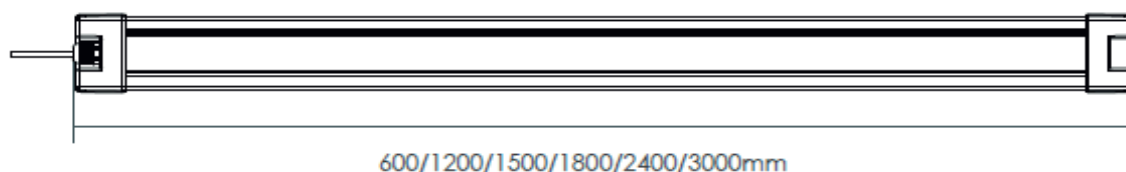


600/1200/1500/1800/2400/3000mm

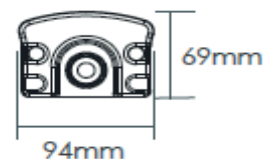

94mm



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

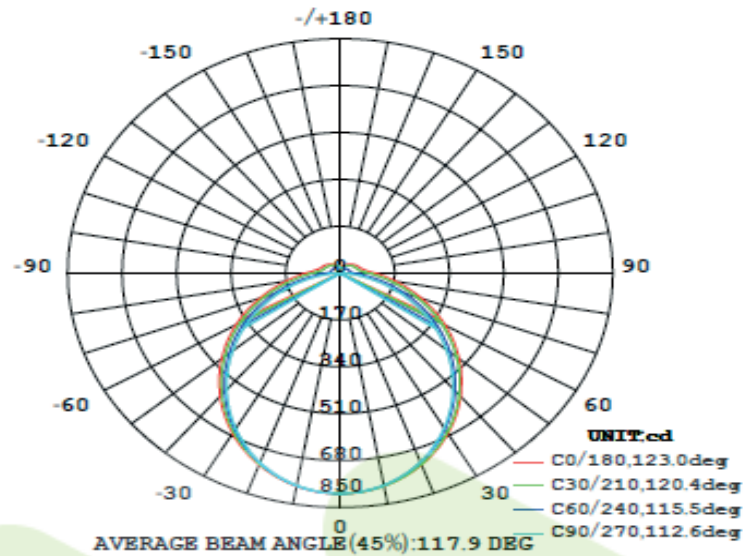

Please note

1. Above efficacy based on 4000K
2. All values are based on an ambient temperature of 25°C
3. Efficacy tolerance is $\pm 10\%$ and wattage tolerance is $\pm 10\%$
4. If CRI>90, light efficiency will be reduced by 10-15%

Applications

