



The Linora Linear Recessed LED is a high-performance architectural lighting solution designed to deliver elegant illumination with maximum versatility. With a sleek 60mm x 60mm profile, it integrates seamlessly into modern interiors, making it ideal for offices, retail, educational, and commercial environments.


Durability and reliability are guaranteed with a 5-year warranty and certified quality, ensuring long-term performance and minimal maintenance. Installation is highly versatile, with options for pendant, ceiling, recessed, or wall-mounted configurations to meet diverse project requirements.




## Technical Data

Lighting direction	Down
Installation	Pendant , Ceicling , Recessed , wall mounted
Beam angle	PC:105° , M1:72° , M2:70°
Light efficiency	100lm/W
Profile	W60mm*H60mm
Power	28 W/m
Optic	DF , M1 , M2
CCT	2700K / 3000K / 4000K / 6500K / RGB
DIMMING	NON , 0-10V , DALI
Input voltage	200-240V , 100-277V
CRI	>80 , >90 , >95
Warranty	5 Years


DF | PC cover



M1 | Prismatic plates




M2 | Prismatic plates plus




# Lamps Parameter

Length [mm]	Power [w]	Luminous [lm]
500	14	1400
600	16.8	1680
700	19.6	1960
800	22.4	2240
900	25.2	2520
1000	28	2800
1100	30.8	3080
1200	33.6	3360
1300	36.4	3640
1400	39.2	3920
1500	42	4200
1600	44.8	4480
1700	47.6	4760
1800	50.4	5040
1900	53.2	5320
2000	56	5600
2100	58.8	5880
2200	61.6	6160
2300	64.4	6440
2400	67.2	6720

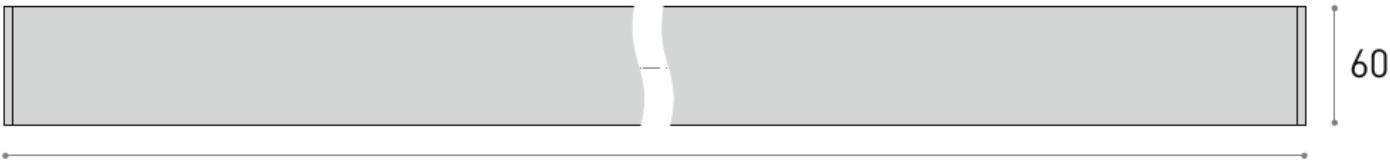

PROFILE SECTION



COLOUR More custom colors



Silver



Black





White





INSTALLATION





# Installation-Profile connection

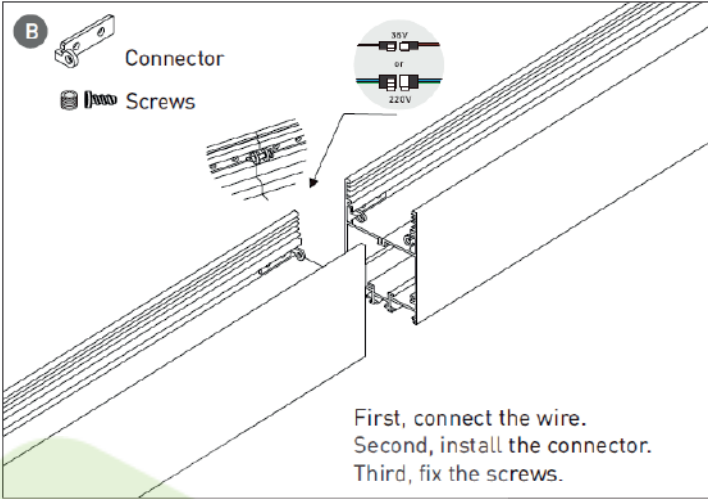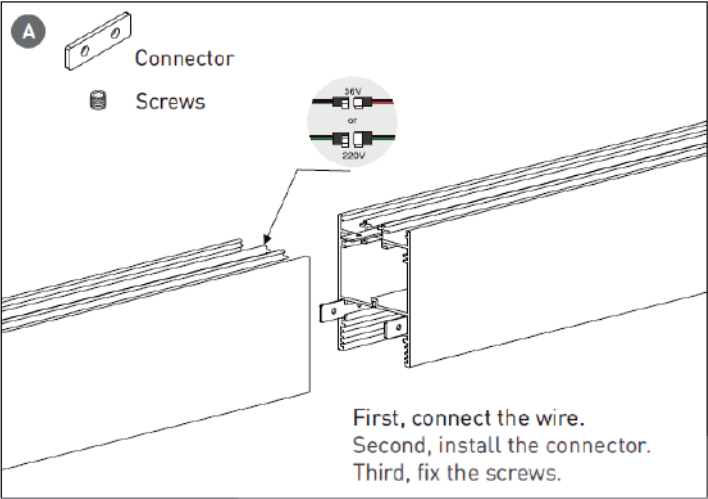





# Installation-Cover

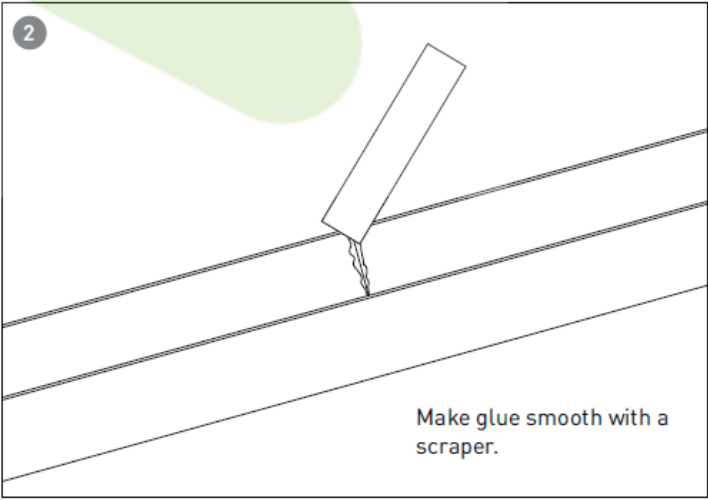
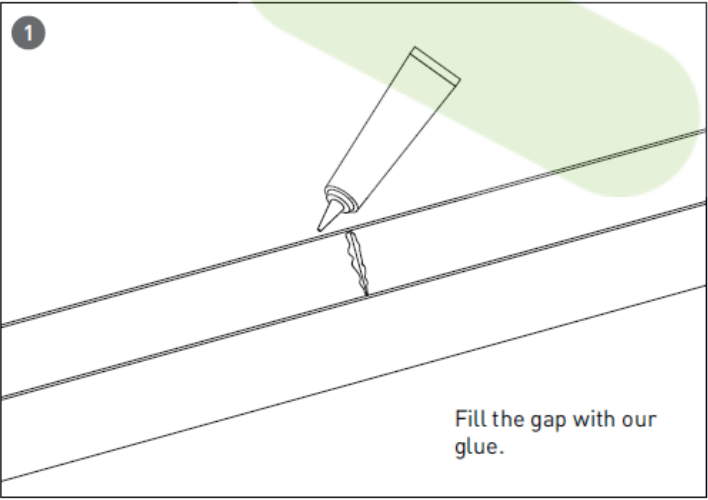
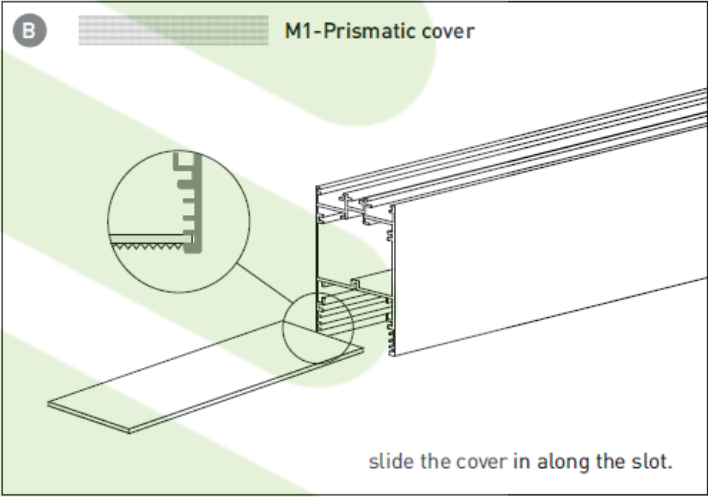
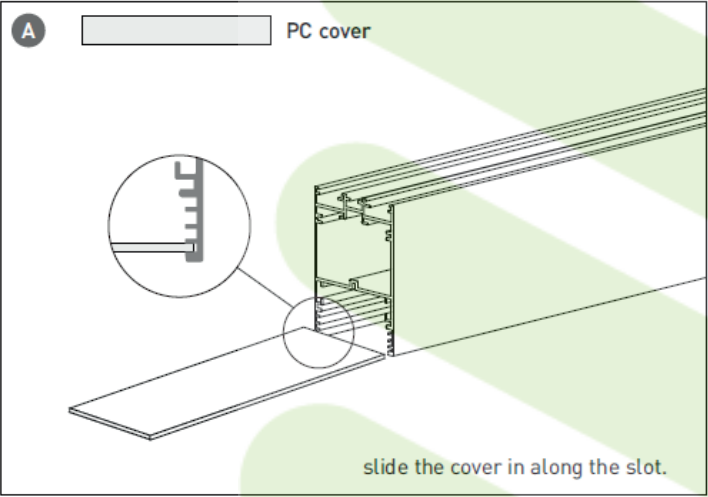


## Installation-End cap

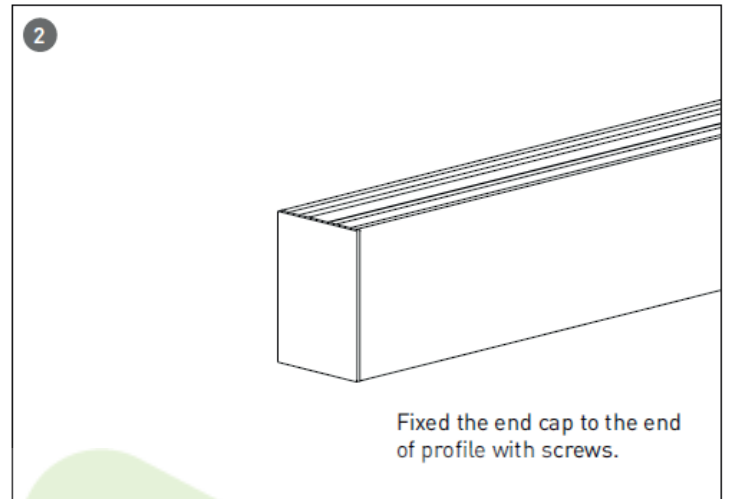
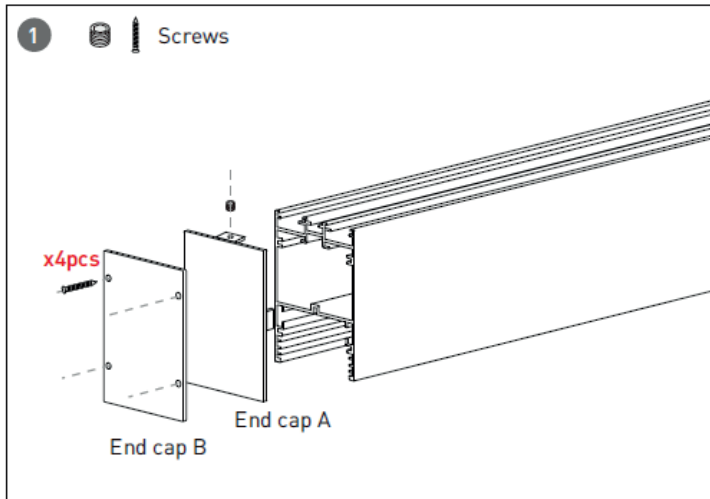


## Installation-Pendant cable

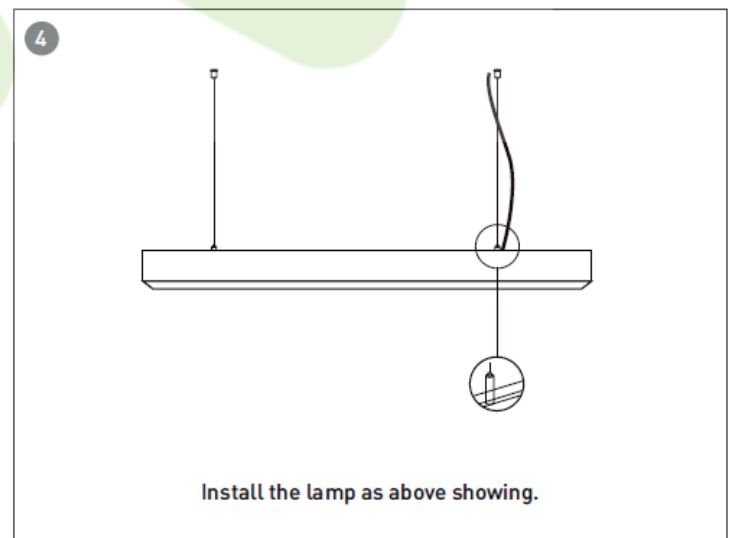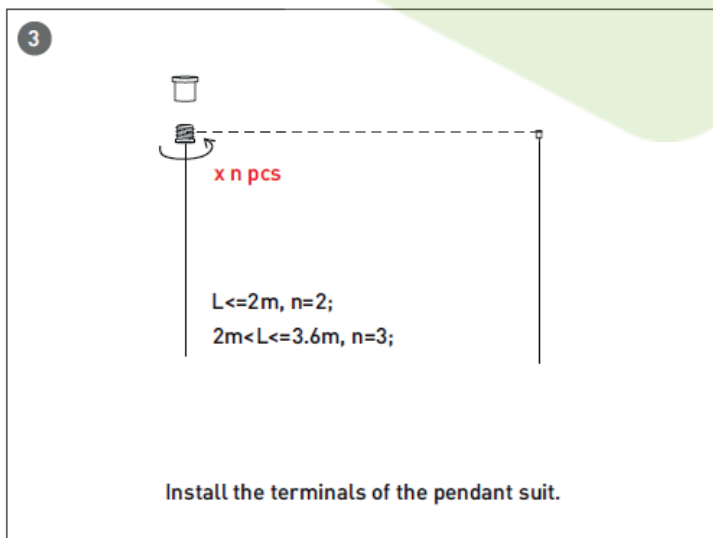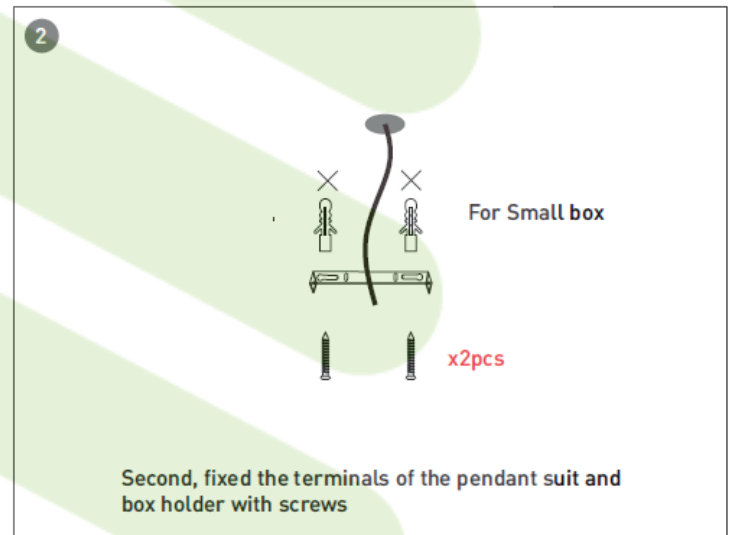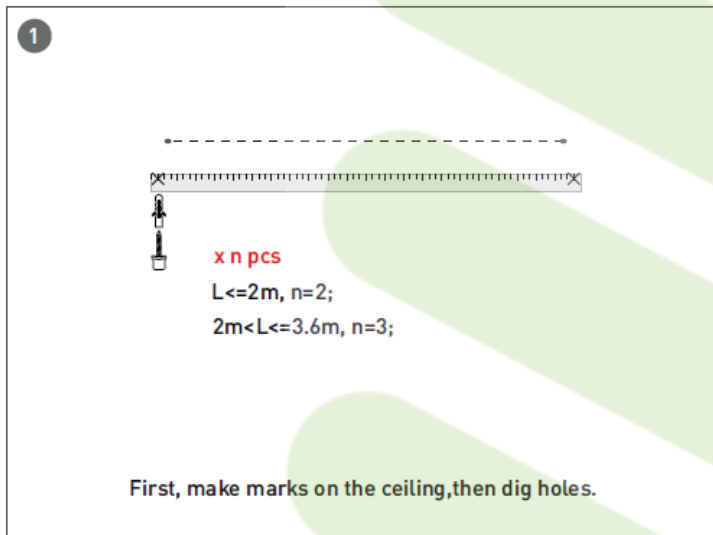


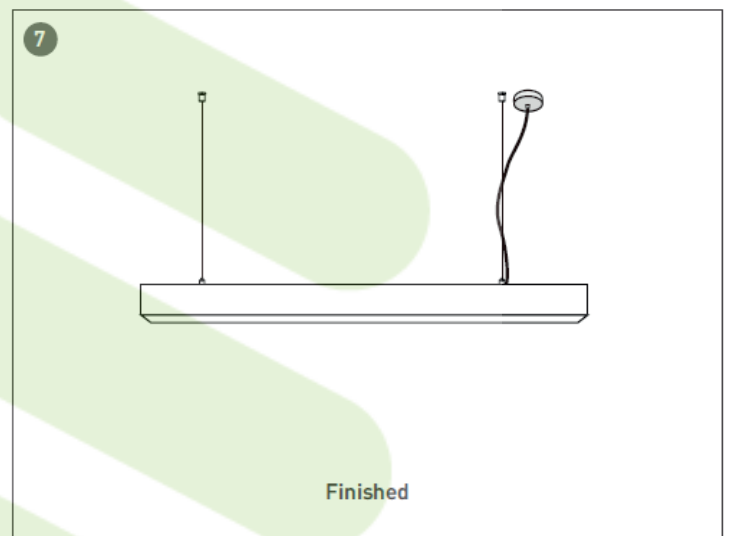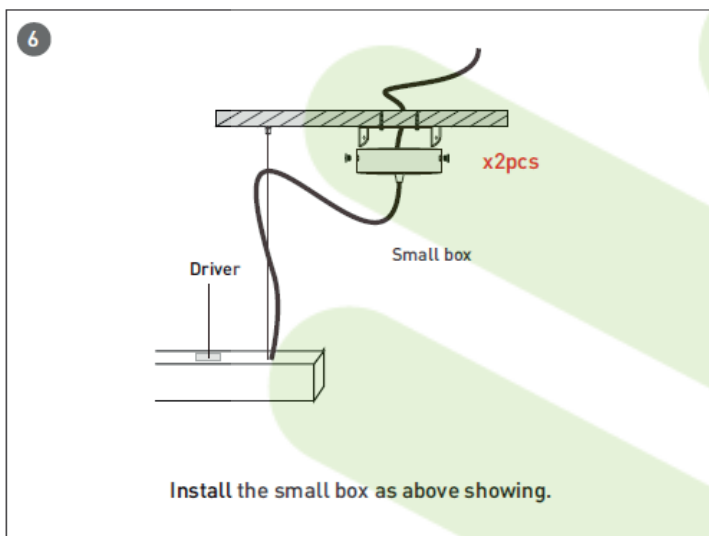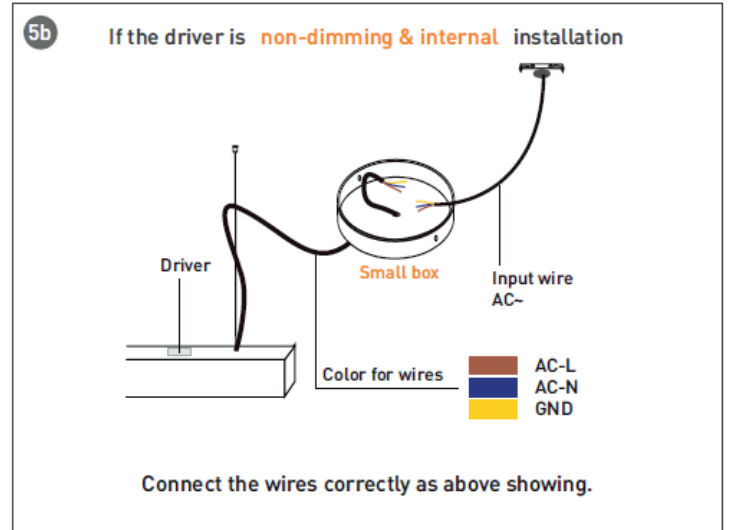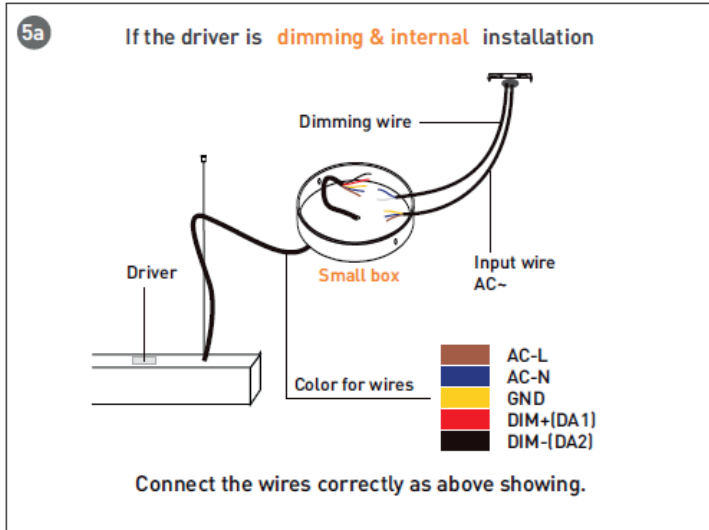

## Installation-Clip ceiling

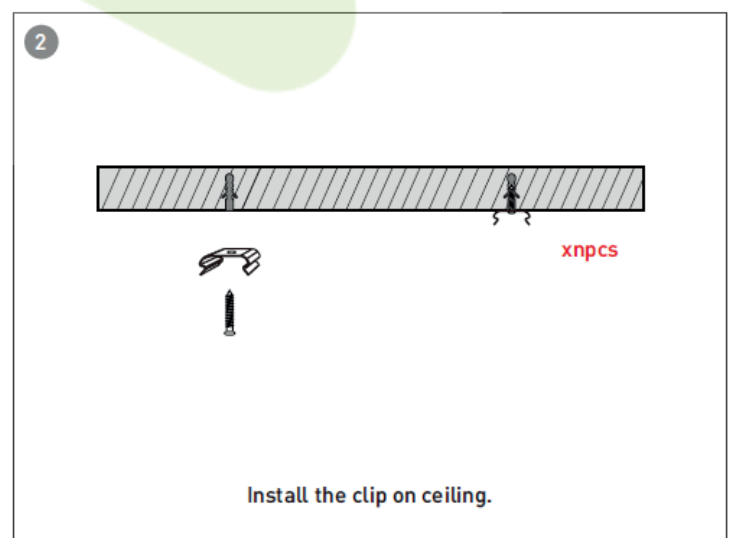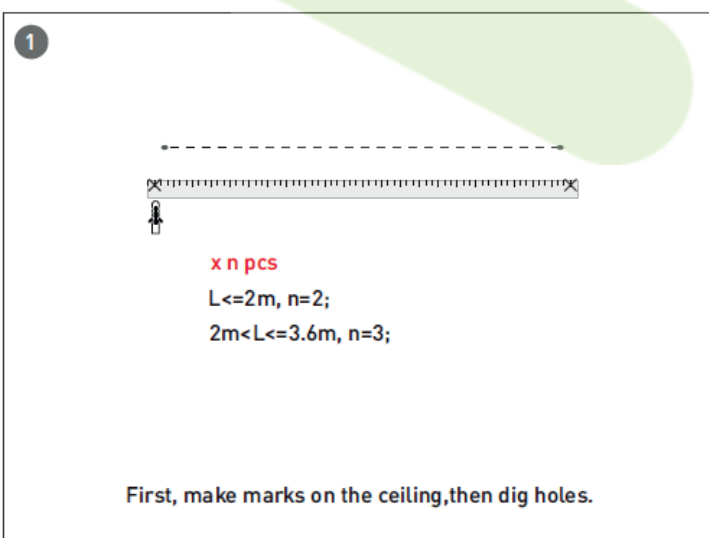


3a

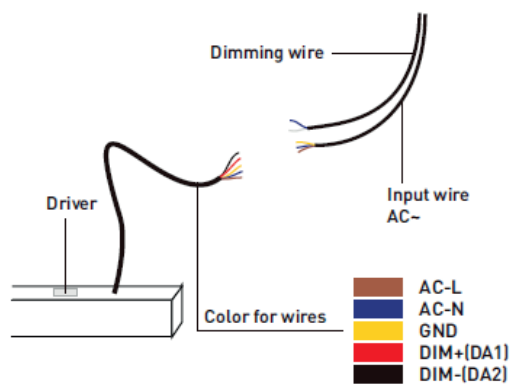If the driver is **dimming & internal** installation


Connect the wires correctly as above showing.

3b

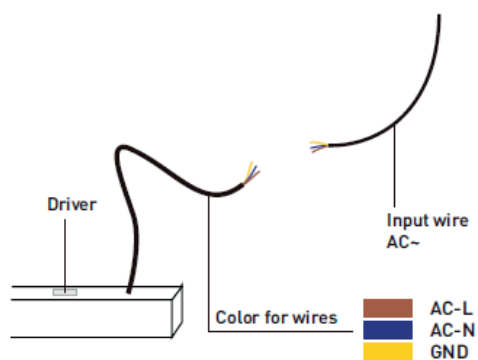If the driver is **non-dimming & internal** installation


Connect the wires correctly as above showing.

4

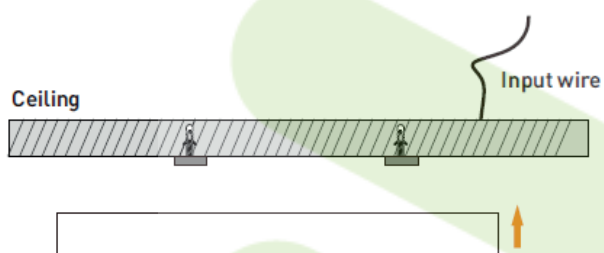

Install the lamp.

5

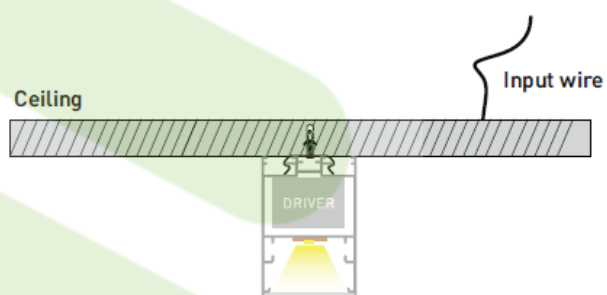

Install the lamp.


6



Finished.


# Installation-Clip recessed

1

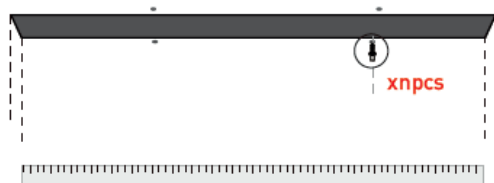


First, make a hole by the size of the lamp, and fixed the screws on ceiling.

2




Install the clip above showing.

3

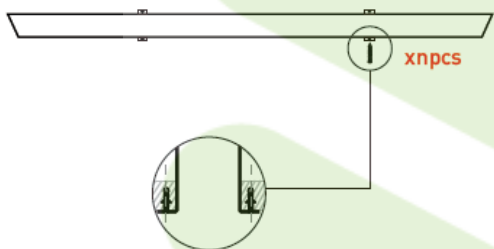

Install the lamp with the screws.


4

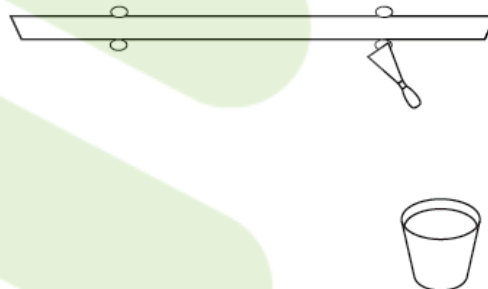

Make the ceiling smooth with the tool.

5a


If the driver is **dimming & internal** installation

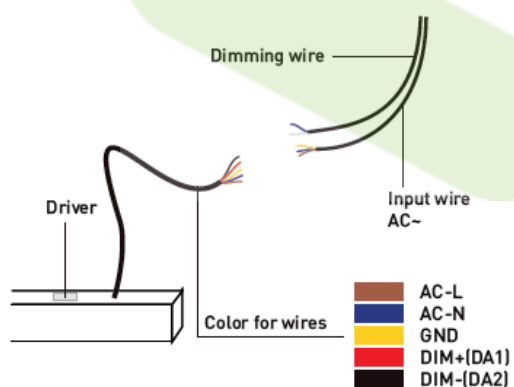



Connect the wires correctly as above showing.

5b





If the driver is **non-dimming & internal** installation

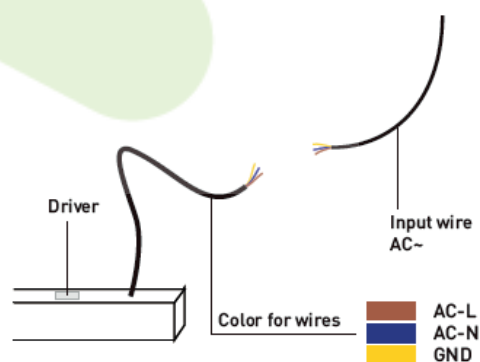

Connect the wires correctly as above showing.

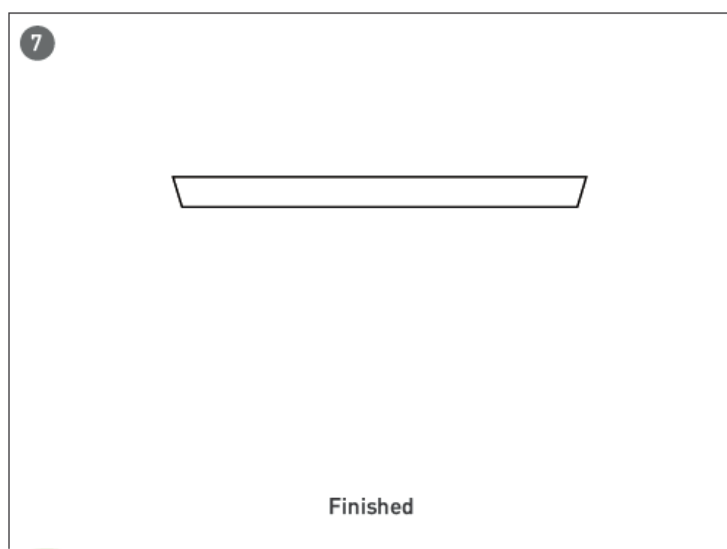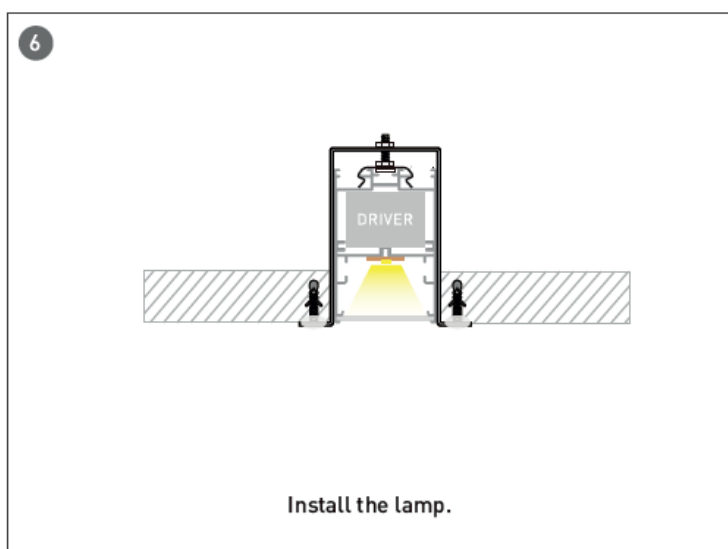


## Installation-Wall mounted

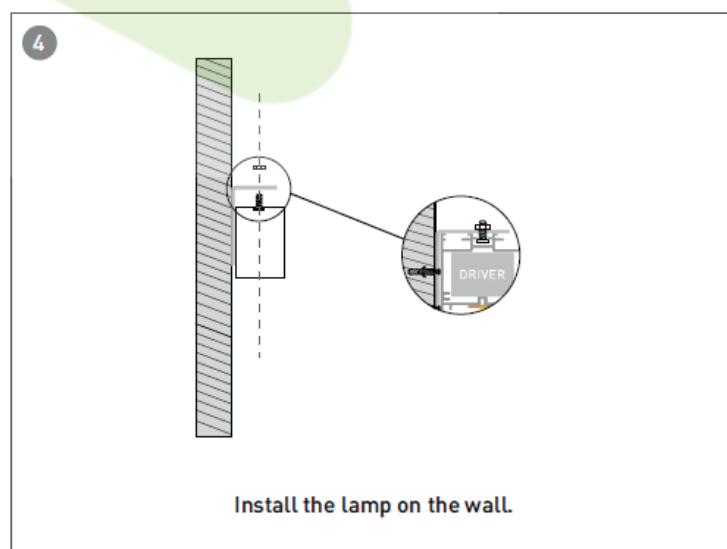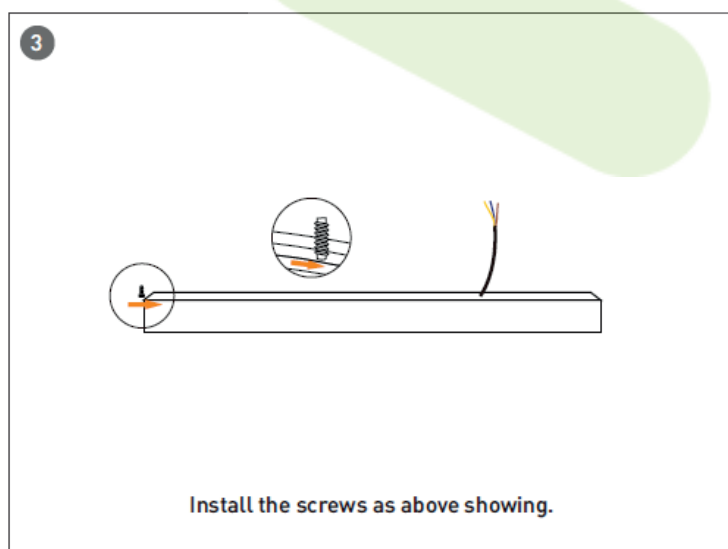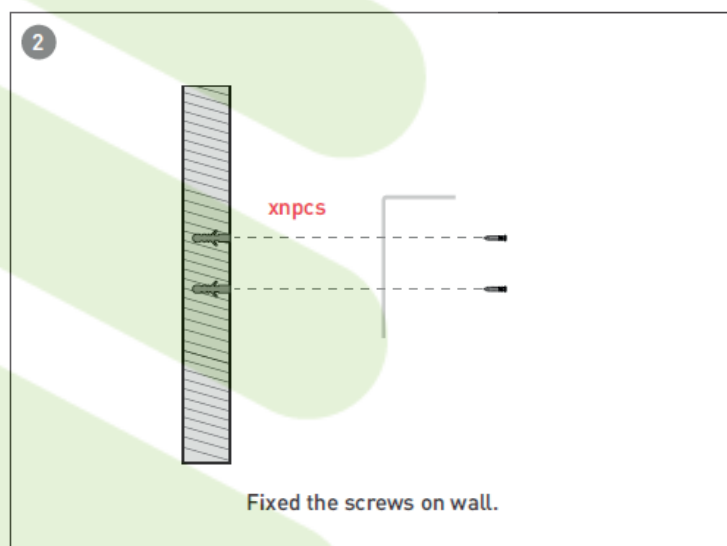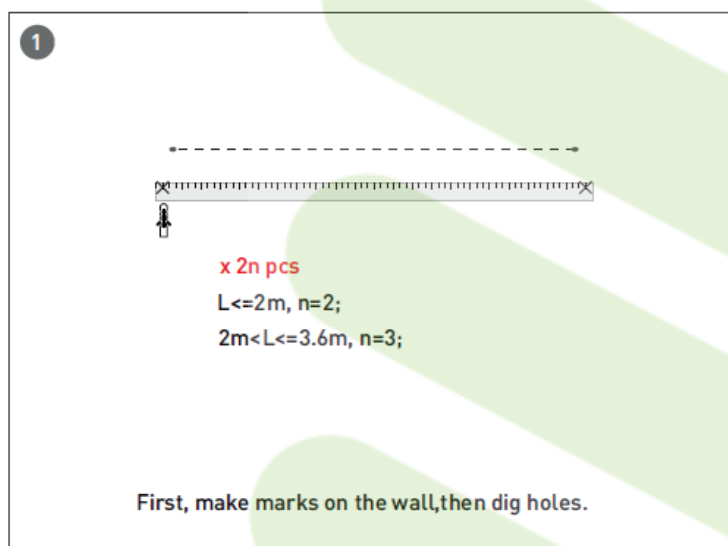




5a

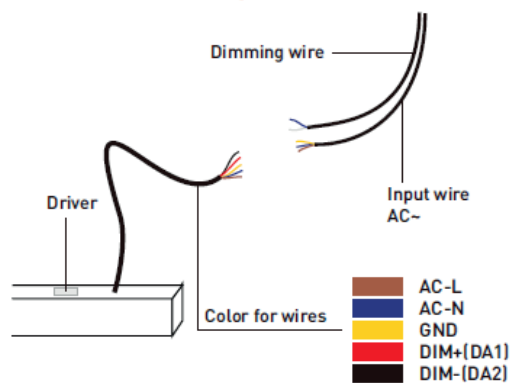If the driver is **dimming & internal** installation

Connect the wires correctly as above showing.

5b

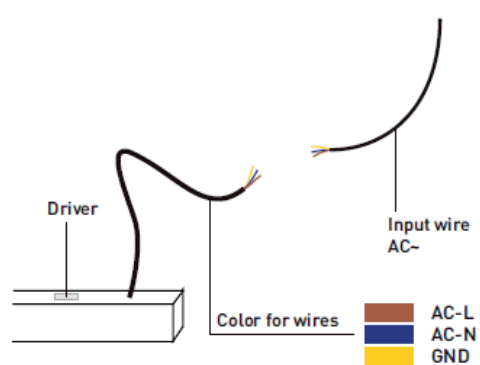If the driver is **non-dimming & internal** installation

Connect the wires correctly as above showing.

6



Finished.